


THE MOST IMPORTANT DATA AT A GLANCE.

Variants, WLLs.

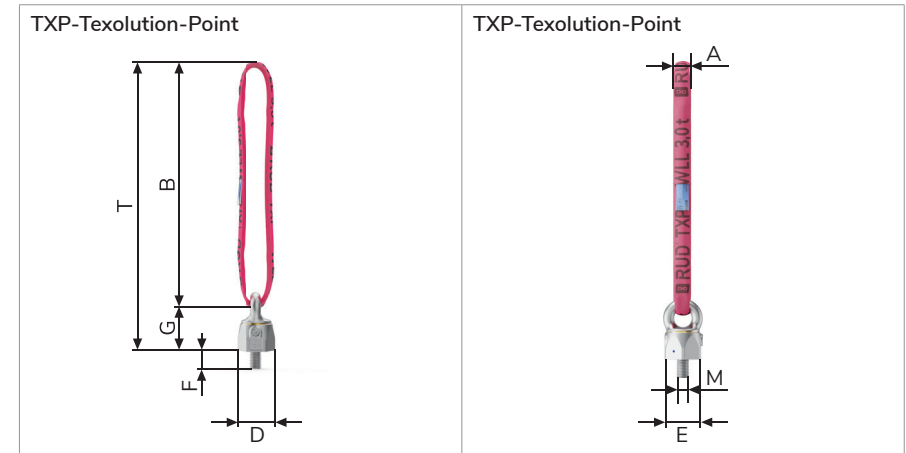

Designation	Load capacity WLL [lbs]	A [inch]	B [inch]	D [inch]	E [inch]	F [inch]	G [inch]	M [inch]	T [inch]	Weight [lbs/unit]	Order no.
TXP-1.3 t M16 L = 0.5 m	2,860	Approx. 1.4	19.69	1.89	1.61	0.98	2.44	M16	22.05	1.76	7911575
TXP-1.3 t M16 L = 1.0 m	2,860	Approx. 1.4	39.37	1.89	1.61	0.98	2.44	M16	41.73	2.42	7911576
TXP-1.3 t with variable thread	2,860	Approx. 1.4	19.69 or 39.37	1.89	1.61	0.63–7.08	2.44	M16 Vario ¹	22.05 or 41.73	2	8600662
						7.12–8.85		M16 x 1.5 Vario			
						0.63–2.75		5/8"– 11 UNC Vario			
						0.63–1.14					
						1.92–7.08					
TXP-2.0 t M20 L = 0.5 m	4,400	Approx. 1.4	19.69	2.44	2.17	1.34	3.31	M20	22.83	3.52	7911569
TXP-2.0 t M20 L = 1.0 m	4,400	Approx. 1.4	39.37	2.44	2.17	1.34	3.31	M20	42.52	3.96	7911570
TXP-2.0 t with variable thread	4,400	Approx. 1.4	19.69 or 39.37	2.44	2.17	0.79–8.78	3.31	M20 Vario ¹	22.83 or 42.52	2	8600663
						0.79–3.46		M20 x 1.5 Vario			
						0.87–3.7		M22 Vario ¹			
						0.75–1.14		3/4"– 10 UNC Vario			
						2.2–8.74					
0.75–2.6	3/4"– 16 UNF Vario										
TXP-3.0 t M24 L = 0.5 m	6,600	Approx. 1.4	19.69	3.19	2.76	1.42	3.82	M24	23.62	5.72	7911556
TXP-3.0 t M24 L = 1.0 m	6,600	Approx. 1.4	39.37	3.19	2.76	1.42	3.82	M24	43.31	6.38	7911557
TXP-3.0 t with variable thread	6,600	Approx. 1.4	19.69 or 39.37	3.19	2.76	0.94–10.12	3.82	M24 Vario ¹	23.62 or 43.31	2	8600664
						0.94–3.82		M24 x 1.5 Vario			
						0.94–1.65		M24 x 2 Vario			
						1.06–3.62		M27 Vario ¹			
						0.98–2.99		1"– 8 UNC Vario			
						3.03–9.69					

Subject to technical changes! ¹With nut and washer possible. ²Weight depending on design.